



- 6th generation Intel® Core processor family
- Supports four USB 2.0 ports & Six USB 3.0 ports
- Dual Display : VGA & DP& HDMI
- DVD SuperMulti Drive
- V-Pro

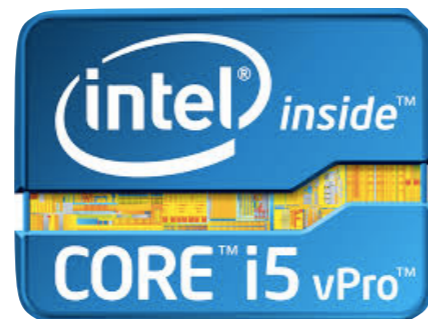

Processor	Intel® Core™ i5-6400 Processor (6M Cache, up to 3.30 GHz)
Storage	128 SSD SATA III, 128 GB, 2.5-inch Up to 1 To
Chipset	Intel® Q170 Express Chipset
Bios	AMI BIOS with 128 MB SPI Flash ROM Supports M.I.B III Utility F7 hot key for boot up devices option Triple Display Multi-Language BIOS Secure boot
OS SUPPORT	Windows 7 64 Bit Windows 10 64 Bit Windows 10 32 Bit
Memory	8GB DDR4 Dual-channel DDR4 Memory architecture Supports DDR4 2133 non-ECC, Un-buffered SDRAM Memory 4 X 288-pin DDR4 DIMM socketSupport up to 64 GB*
Input / Output ports	Front Panel 2 x USB 2.0 port Optional 2*USB 3.0 1 x microphone(3.5mm) ; 1 x headphone(3.5mm) 1 x Power button, power LED 1 x DVD
	Rear Panel 1 X PS/2 Keyboard & PS/2 mouse connectors 1 X Audio port (Line Out/Line In/Mic In) 1 X RJ-45 port 1 X HDMI port(s) 1 X DVI-I port(s) 1 X D-Sub (VGA) port(s) 1 X Display port 4 X USB3.0 port(s) 2 X USB2.0 port(s)
Resolution	DVI-I: Up to 1920*1200@60Hz VGA: Up to 1920*1080@60Hz
Audio	6-Channel HD audio CODEC Realtek ALC662·Realtek ALC662 6-channel High Definition audio CODEC Meets performance requirements for Microsoft WLP 3.08 Vista premium and mobile PCs· Six channel DAC supports 16/20/24-bit PCM format for 5.1 channel audio solution Emulation of 26 sound environments to enhance gaming experience· Voice Cancellation and Key Shifting in Karaoke mode Compatible with Direct Sound 3D™, A3D™, I3DL2
Network	RJ-45 10/100/1000 Base-T Ethernet Boot from LAN :RPL/ PXE

USB	6 X USB3.0 port(s) up to 5Gb/s (either rear I/O or front header) 6 X USB2.0 port(s) Up to 480 Mb/s
LAN	Other chip: intel i-219LM
Chipset	Intel® Q170 Express Chipset
CONNECTORS & HEADERS	1 X 24-pin ATX Power Supply connector 1 X 4-pin 12V Power connector 1 X 4-pin CPU_FAN connector 1 X 4-pin SYS_FAN connector 1 X Front Panel MIC/Speaker out header 1 X Front panel audio header 1 X Speaker header 1 X USB 3.0 header / Support additional 2 USB ports 2 X USB 2.0 header / Support additional 4 USB ports 1 X CLR_CMOS header 2 X Serial port header (COM) /Support additional 2 Serial Port (COM) 1 X Parallel port header (LPT) 1 X Onboard TPM 1.21 X LDC header
Bios	AMI BIOS with 128 MB SPI Flash ROM Supports M.I.B III Utility F7 hot key for boot up devices option Triple Display Multi-Language BIOS
STORAGE	Support by Q170 Express Chipset 4 X Serial ATAIII 6Gb/s RAID0, RAID1,RAID5, RAID 10 configuration
GRAPHICS	Supports DirectX 12 Supports HDMI 1.4a & Premium Audio
EXPANSION SLOT	1 X PCI Express X16 Gen 3.0 slot(s) 1 X PCI Express X 4 Gen 2.0slot(s) 1 X PCI Express X 1 Gen 2.0 slot(s) 1 X M.2 slot for SSD For 2242/2260/2280 SSD 1 X PCI slot(s)
Network	RJ-45 10/100/1000 Base-T Ethernet Boot from LAN :RPL/ PXE
Dimensions	Dimensions: : 356 x 103 x 340 mm
CERTIFICATIONS	CE/FCC Certification ErP/EuP Certification
Warranty	one year hardware warranty Optional 3 Years

FRONT SIDE VIEW

- 1 Audio Out /Mic In
- 2 USB 2.0 ports * 2
- 3 Power LED
- 4 DVD



REAR SIDE VIEW

- 5 PS/2
- 6 DP
- 8 HDMI
- 9 VGA port
- 10 DVI-I port
- 11 USB 3.0 ports * 4
- 12 Ethernet -RJ45 LAN port
- 13 USB 2.0 ports * 2
- 14 Audio

